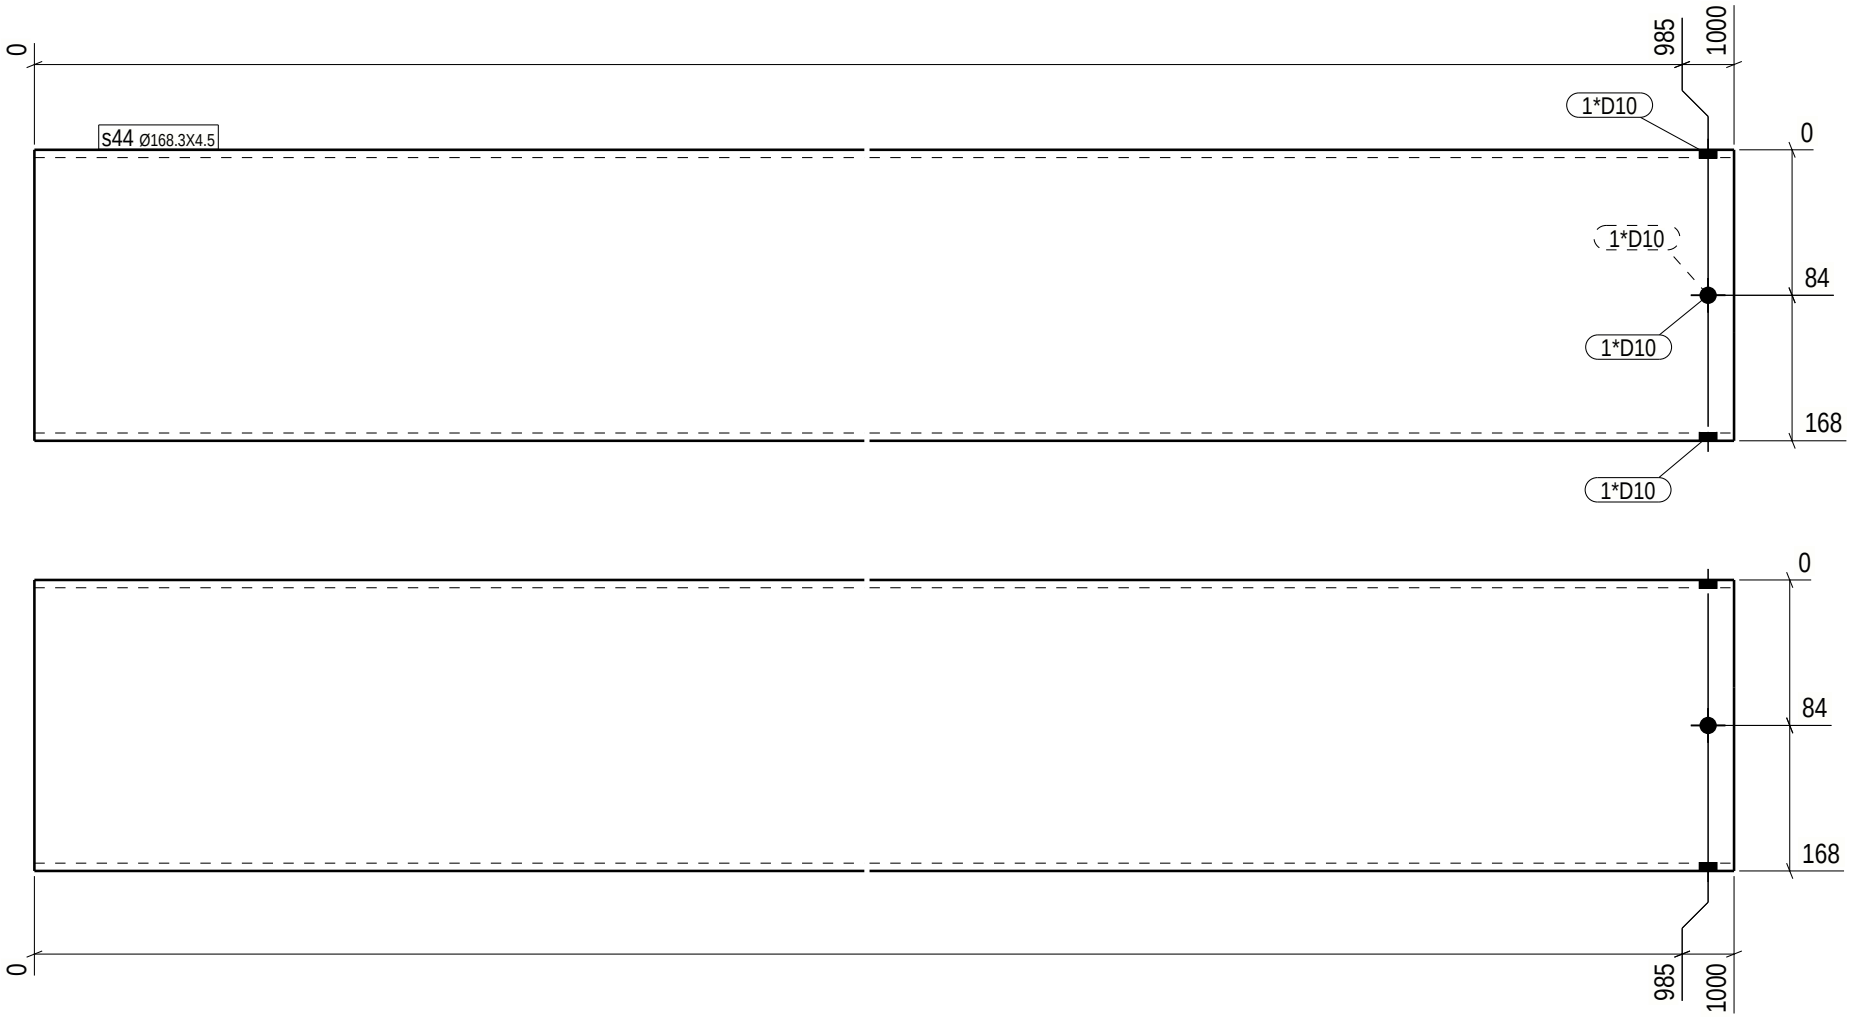


GENERAL NOTES: For your safety, check weight before handling:
0-5kg Light 5-15kg Normal 15+kg Heavy

MATERIAL LIST FOR PART - S44 16 PARTS REQUIRED

POS. No.	PROFILE	No.	GRADE	L (mm)	AREA (m^2)	WEIGTH (kg)
s44	Ø168.3X4.5	1	S355J2	1000	0.5	18.0 !!
			TOTAL WEIGHT FOR	16	PARTS	287.5

Part list	Qty.
GS	16

Execution class: EXC 2

No utilization on drawings = over 50%

V-SEAM
Utilization under 50%
EXC 2=> Acc. to process control
EXC 3=> 20% UT
Utilization over 50%
EXC 2=> 10% UT
EXC 3=> 20% UT

* o 3 0 4 8 0 - 3 * DS Stålkonstruktion * W s 4 4 *

PROJECT	Akkasæter Lager- og vedlikeholdshall			PHASE	3 / Phase 3
MEMBER	Søjle		QUANTITY: 16	PROJECT No	30480-3
REVISION		ISSUED: 04.11.2025	DRAFTER: ZLL BIM control: SST	DRAWING No.	S.44

Tekla Structures