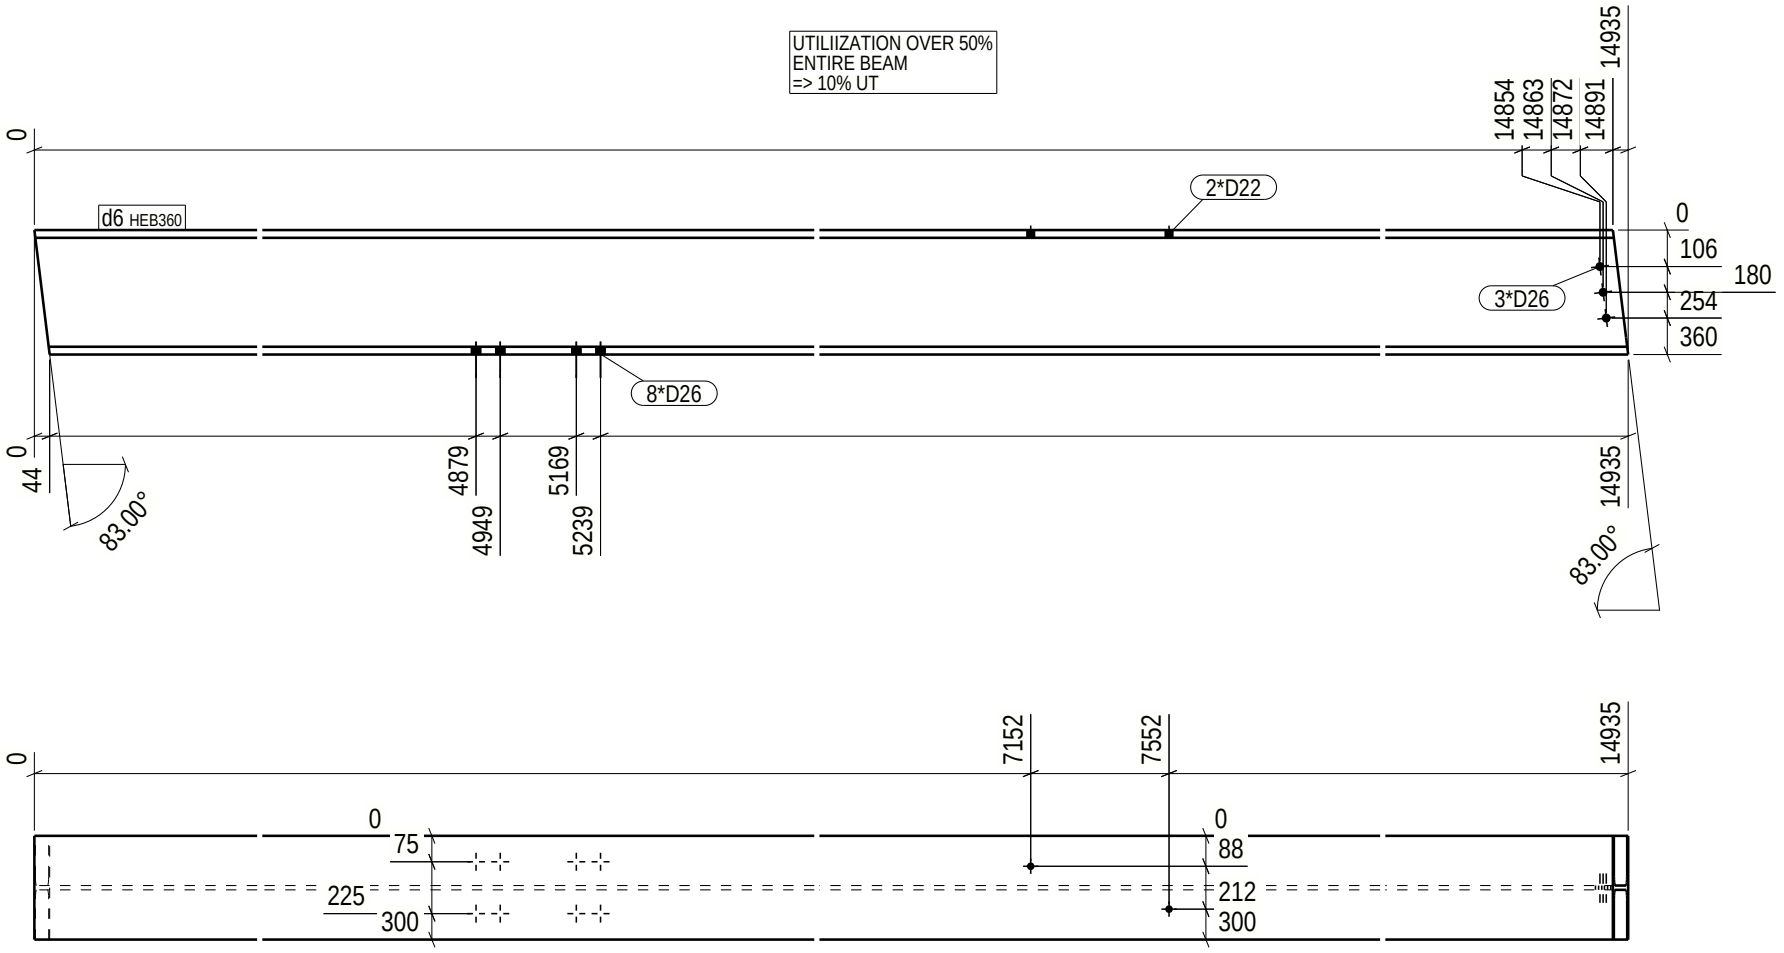


GENERAL NOTES: For your safety, check weight before handling:
0-5kg Light 5-15kg Normal 15+kg Heavy

MATERIAL LIST FOR PART - d6 1 PARTS REQUIRED

POS. No.	PROFILE	No.	GRADE	L (mm)	AREA (m^2)	WEIGTH (kg)
d6	HEB360	1	S355J2	14935	27.6	2117.4 !!
			TOTAL WEIGHT FOR	1	PARTS	2117.4

Part list	Qty.
DR	1

Execution class: EXC 2

No utilization on drawings = over 50%

V-SEAM
Utilization under 50%
EXC 2=> Acc. to process control
EXC 3=> 20% UT
Utilization over 50%
EXC 2=> 10% UT
EXC 3=> 20% UT

* o 3 0 4 8 0 - 1 * DS Stålkonstruktion * W d 6 *

PROJECT	Akkasæter Lager- og vedlikeholdshall			PHASE	1 / Phase 1
MEMBER	Drager		QUANTITY: 1	PROJECT No	30480-1
REVISION		ISSUED: 07.11.2025	DRAFTER: ZLL BIM control: SST	DRAWING No.	d.6

Tekla Structures